





SERENE EXTENSION ARM MOUNTING INSTRUCTIONS

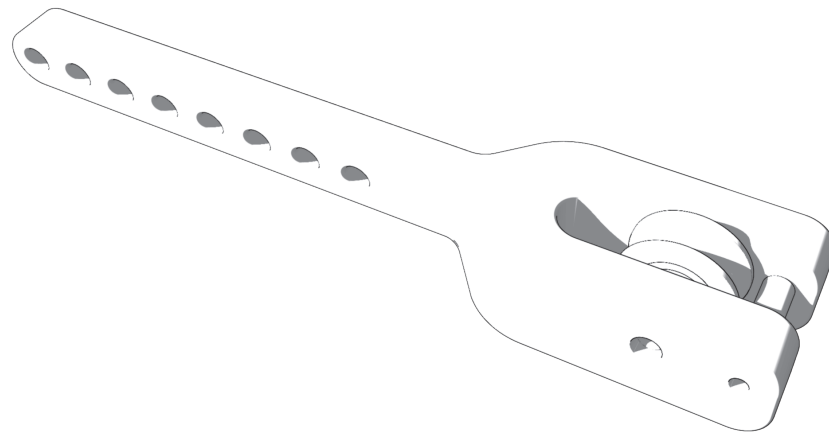


Installing the Serene extension arm is a simple procedure. Follow these few steps and you will be done in a couple of minutes! Be sure to keep the orange pulley, washers and screws removed in step 1 and 2. Those are excellent spare parts if ever needed.

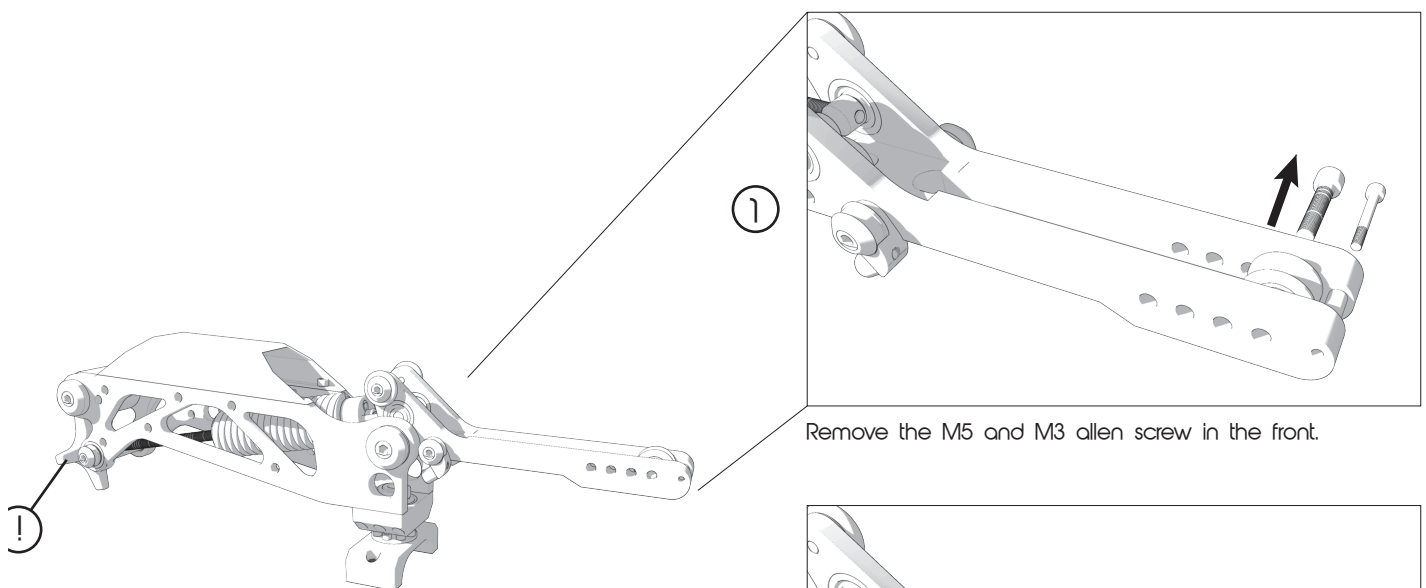


Remove the M5 and M3 allen screw in the front.


Always release the tension of the spring before doing any modification to the Serene arm to prevent any damages!

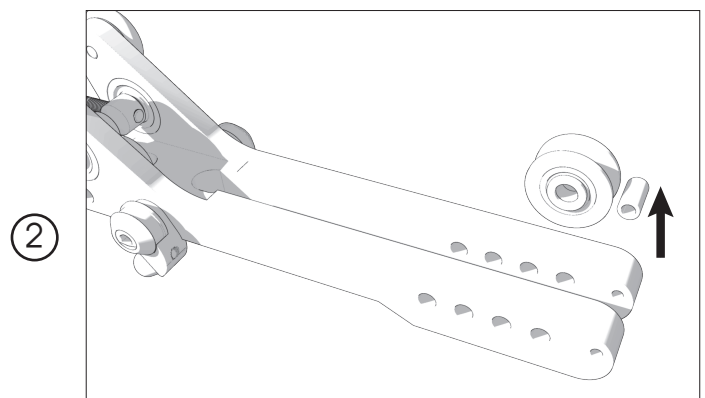


Remove the orange pulley, washers and the PEEK protection roller, and store together with the M5 and M3 screw removed earlier.

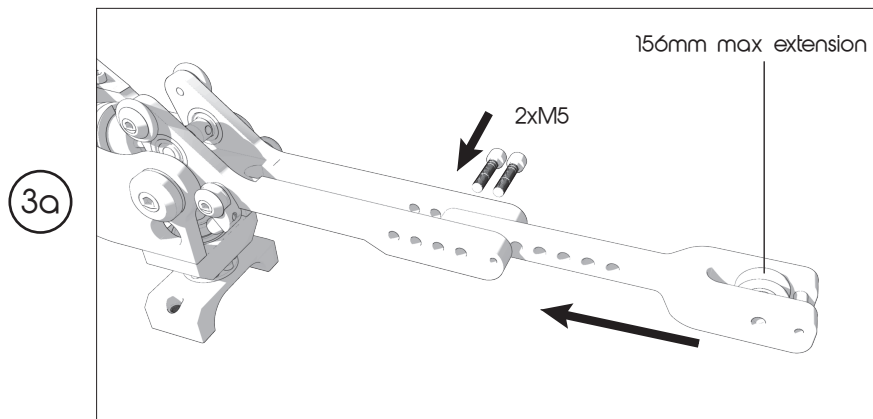

Use the two supplied M5 allen screws and slide in the Serene extension arm. If your camera setup never exceeds 15kg weight, attaching the extension arm in the outermost position is possible. You can choose any other setting but the illustration shows the outermost possible scenario. With the provided Serene heavy extension arm spring, 15kg is possible. If you can get away with smaller springs (light or heavy), we do recommend those. Lighter springs always give a slightly better performance (reduce springiness). For instructions how to change the springs, please refer to the Serene arm documentation.

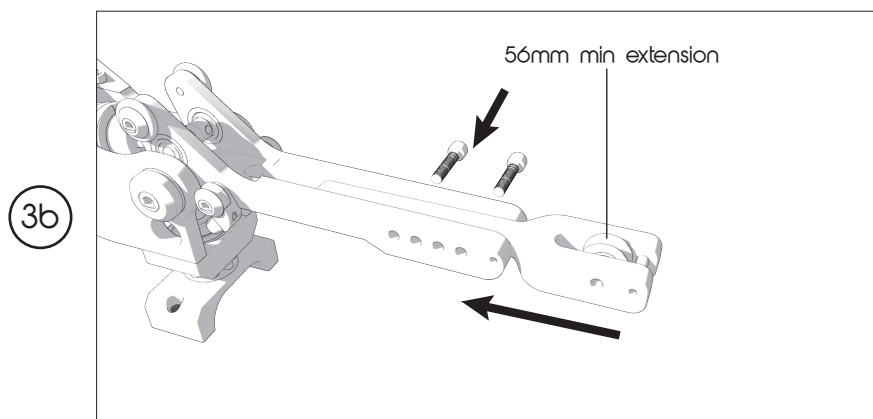

If you think the camera is too far away from your body, or if your camera setup is closer to 20kg, the innermost position is needed. You can of course choose any of the positions between fig 3a or 3b. The innermost position together with the Serene heavy extension spring gives a max weight of 195kg. Again using a smaller spring always gives a slight better performance, so when it's possible downgrade to a Serene heavy or Light spring.

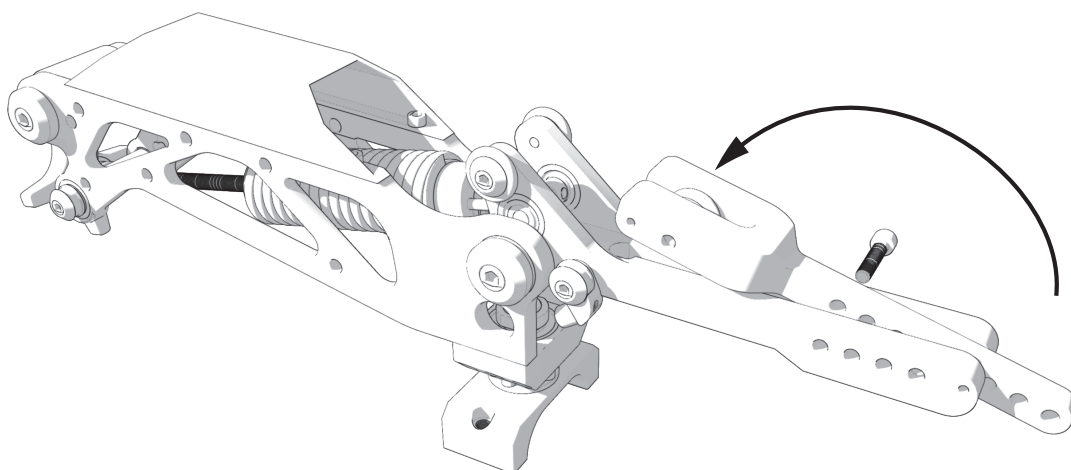

If you find the Serene arm difficult to storage. Please remove one of the supplied M5 screws, so the arm can swivel around the second one. Always release the tension of the spring before this is being done however to avoid any damages!